



# SYDNEY XL

*\_Refrigerators and freezers. Plug-in installation*

## High storage capacity and robustness.

SYDNEY XL guarantee maximum ease of use and best-possible product presentation. The modern and ingenious exterior design makes shopping an exciting experience.



### HIGH VOLUME OF GOODS

Thanks to their front and side glass panels, SYDNEY XL offer best-possible visibility of the goods on display. The smooth-running push-pull lid ensures easy removal of merchandise. Thanks to the height- and width-adjustable product racks, the bright LED lighting and the protective bumper strip with integral price display facility, produce can be presented perfectly.



### LOW COSTS

The low investment outlay and operating costs of the robust and resilient cooling units speak for themselves. In addition, the outer-skin condenser on SYDNEY XL provides for completely maintenance-free refrigeration.



### HIGH ENERGY SAVINGS

Save even more compared to conventional multi-unit systems, thanks to the sophisticated technology and design with AHT e-conomize. In addition, the electronically controlled, variable-speed compressor (VS) ensures maximum energy efficiency.



### ENVIRONMENT AND CLIMATE

SYDNEY XL units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). R290 has the lowest GWP on the market. This makes them particularly environmentally friendly.



### INTELLIGENT INSTALLATION

Ready-to-connect installation means that SYDNEY XL units can be used immediately. They are available as in-line and end cabinets and impress with their large product storage capacity and handles in various matching colours. They can be easily combined with overhanging KINLEY XL unit.



### AUTOMATIC DEFROSTING

Automatic defrosting is possible in all temperature ranges. The constant temperature and high-quality plastic containers mean that the shelf life and hygiene of all products are always ensured.



### COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores.

## INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



## TEMPERATURE RANGES

Cooling	+37.4F to +59F <sup>1</sup>
Freezing	0F to -10F
Meat chilling	+32F to +35.6F

<sup>1</sup> Fixed preset that can be changed by a service technician

## *Advantages*

### *EXTRA DEPTH AND LENGTH*

Thanks to the dimensions of the SYDNEY XL, this refrigerator and freezer unit provides maximum space for your products.

### *OPTIMUM PRODUCT VISIBILITY*

The stylish glass side and front panels provide an excellent view of the unit interior. Together with the bright LED interior lighting, they enable perfect presentation of frozen & cooled products.





STANDALONE UNIT



IN-LINE UNIT



BLOCK INSTALLATION

**CONFIGURATIONS**

Solo



Row




Block



Island




- \_ optionally with end cabinet on both sides
- \_ extendible with commercially available shelf attachments

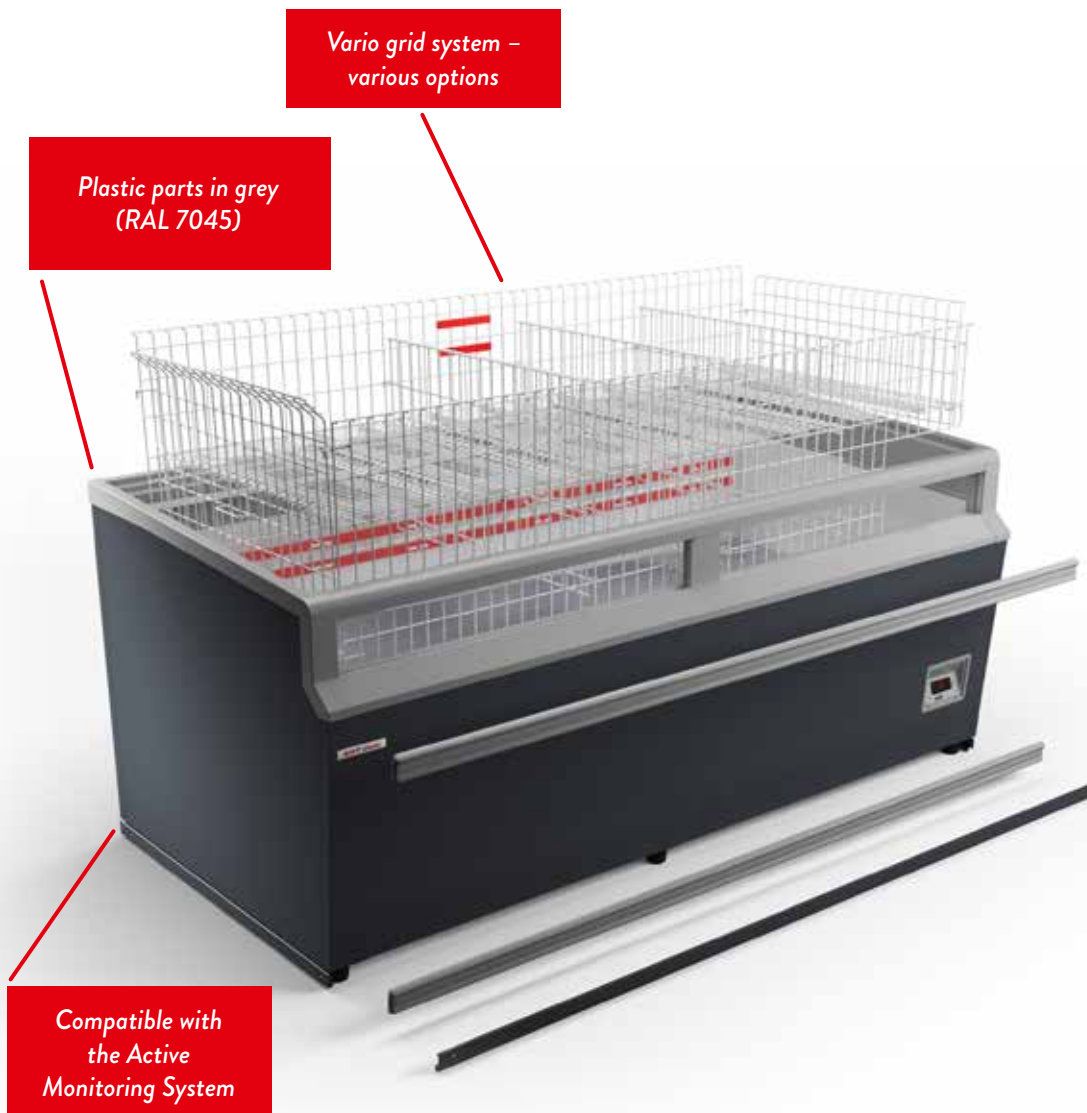


## ACCESSORIES

- \_ High cover (between the back-to-back units)
- \_ Side cover (closes off the island at the sides)
- \_ Water protection strip (colour change on customer request)
- \_ Vario grid system (rack inserts & wire dividers) & wire basket inserts
- \_ Impact protection
- \_ Custom color options available upon request
- \_ Internal LED lighting
- \_ Compatible with the Active Monitoring System (AMS)

## SYDNEY EC 223

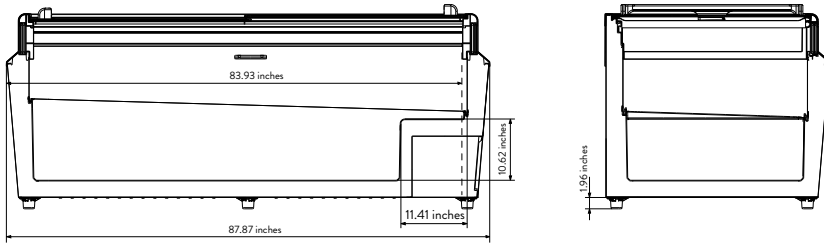

## SYDNEY XL 210

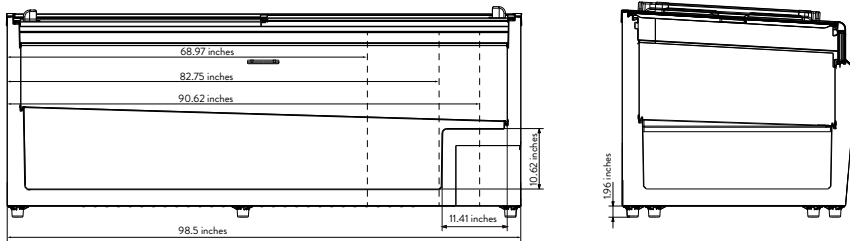

### DIMENSIONS

SYDNEY EC / SYDNEY XL		EC 223	XL 210
Length, exterior / interior	inches	87.87 / 79.96	82.75 / 77.67
Depth, exterior / interior	inches	39.09 / 32	41.06 / 33.97
Height, front / rear	inches	33.85 / 33.85	33.85 / 35.94
Stacking height, front / rear	inches	22.04 / 22.04	22.04 / 22.04



**AHT Cooling Systems USA, Inc.**

7058 Weber Blvd  
Ladson, SC 29456  
T: +1 843 767 6855  
sales@us.aht.at  
us.aht.at